


CVN-69 Milestone 3 Island Project Plan

PARAMETRIC RECONSTRUCTION · CONFIGURATION CONTROL · PRINTABILITY · VALIDATION

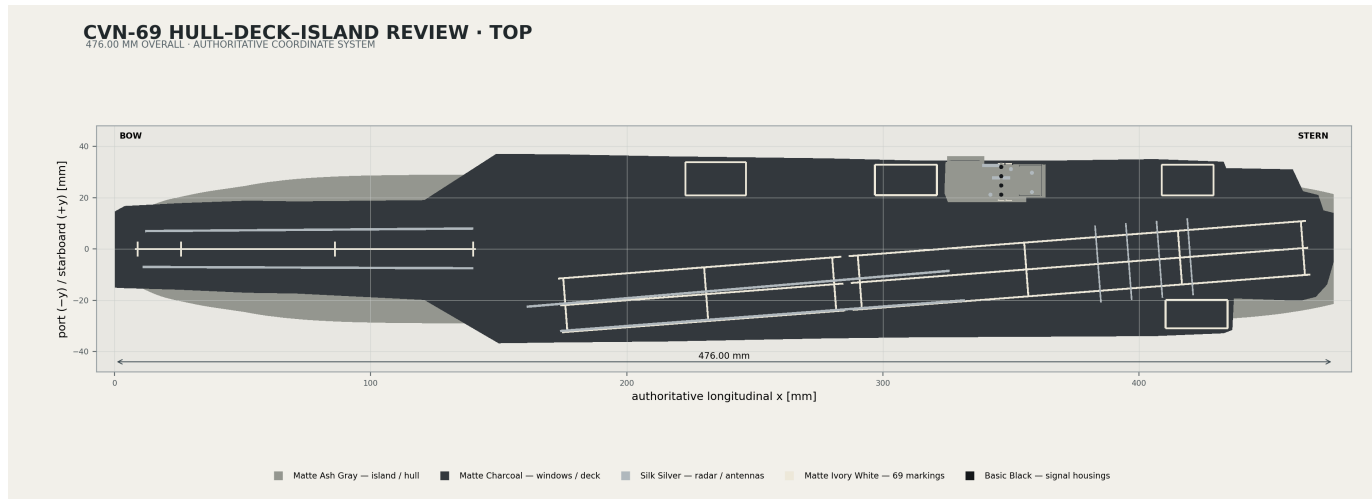

Objective and frozen scope

- Reconstruct only the island as clean FreeCAD/OpenCascade solids and integrate it with the immutable Milestone 2 hull/deck baseline.
- Freeze the 2023–2024 deployment fit using official public references; identify all photo-derived approximation and uncertainty.
- Deliver glue-only, no-paint, 0.4 mm-nozzle parts and a physical reproduction of the production interface.
- Exclude weapons, aircraft, deck vehicles, ocean base, display stand, electronics, and final-ship release.

Release gate

No completion or production claim is made unless every required file exists and all BRep, STEP, mesh, interface, interference, 3MF, hash, and Bambu Studio checks pass. A physical first article remains a separate real-world gate.

Work breakdown and evidence

Stage	Deterministic output	Evidence
Reference audit	Configuration_Audit.md; mesh measurements/image	official URLs, access date, source hashes
Parameters	island_parameters.py	imports approved integration/deck modules
CAD build	FCStd, STEP, STL, 3MF, OBJ	new BReps; no STL import
Visual review	14 high-resolution renders	island and integrated orthographic/isometric views
Documentation	drawings, printing, plan, coupon PDFs	object/material/interface schedules
Validation	Markdown + JSON QA	FreeCAD, STEP, STL, 3MF, Bambu Studio


Accuracy classifications

- Dimensionally verified: approved deck datum, opening polygon, coordinate transform, CAD interface clearances.
- Source-mesh-derived: island placement envelope and approximate mast-height envelope only.
- Photo-derived: bridge/PriFly/uptake/mast proportions and major visible platform arrangement.
- Visually approximated: minor antennas, ladder, signal housings, and simplified radar face ribs.

Change control and reproducibility

CVN-69 HULL-DECK-ISLAND REVIEW · BOW ISOMETRIC

MILESTONE 3 REVIEW ASSEMBLY · WEAPONS AND AIRCRAFT OUT OF SCOPE

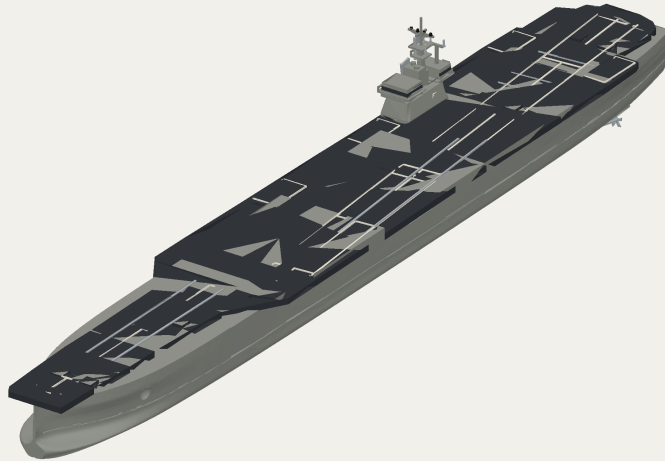

■ Matte Ash Gray — island / hull ■ Matte Charcoal — windows / deck ■ Silk Silver — radar / antennas ■ Matte Ivory White — 69 markings ■ Basic Black — signal housings

- All Milestone 3 work is isolated under Project/Island/. Approved Milestone 1–2 hashes are captured before build and rechecked during validation.
- Generation is executable from repository root. The manifest records SHA-256 and byte size for every production output.
- The integrated hull/deck/island files are non-production review assemblies and do not duplicate baseline production STLs.
- No release tag is created; Milestone 3 stops after commit and push for review.

Configured production parts: 17; coupon parts: 2; frozen period: 2023-10-14 through 2024-07-14 deployment; visible fit frozen at 2024-06-30.